

This guide provides specifications for Unitronics' Uni-I/O™ module UIA-0800NH. This module comprises:

- 8 analog inputs, 12 bit, supports HART protocol

Uni-I/O modules are compatible with UniStream family of Programmable Logic Controllers. They may be either snapped onto the back of a UniStream HMI Panel next to a CPU-for-Panel to create an all-in-one HMI + PLC controller, or installed on a standard DIN Rail using a Local Expansion Adapter.

Installation Guides are available in the Unitronics Technical Library at www.unitronicsplc.com

Analog Inputs					
Number of inputs	8				
Input range ^{(1) (2)}	Input Type	Nominal Values	Over-range Values	Overflow Values	
	0 ÷ 20mA	0 ≤ Iin ≤ 20mA	20 < Iin ≤ 20.3mA	Iin > 20.3mA	
Absolute maximum rating	±30mA (Current)				
Isolation	None				
Conversion method	Successive approximation				
Resolution	12 bits				
Accuracy (25°C / -20°C to 55°C)	±0.5% / ±0.7% of full scale (Current)				
Input impedance	251Ω (Current)				
Noise rejection	10Hz, 50Hz, 60Hz, 200Hz				
Step response ⁽³⁾ (0 to 100% of final value)	Smoothing	Noise Rejection Frequency			
		200Hz	60Hz	50Hz	10Hz
	None	48ms	67ms	70ms	150ms
	Weak	63ms	117ms	130ms	450ms
	Medium	83ms	184ms	210ms	850ms
	Strong	123ms	317ms	370ms	1650ms
Update time ⁽³⁾	Noise Rejection Frequency			Update Time	
	200Hz			2.5ms	
	60Hz			8.33ms	
	50Hz			10ms	
	10Hz			50ms	
Operational signal range (signal + common mode)	Current mode – IxI: -1V ÷ 5.4V ; CMx: -1V ÷ 0.4V (x=0,1,2 or 3)				
Common mode rejection	30dB @ 10Hz, 50Hz, 60Hz or 200Hz noise rejection mode				
Normal mode rejection	60dB @ 10Hz, 50Hz or 60Hz noise rejection mode 45dB @ 200Hz noise rejection mode				
Cable	Shielded twisted pair				
Diagnostics ⁽⁴⁾	Analog input overflow				

IO/COM Bus

Bus current consumption	85mA maximum
-------------------------	--------------


LED Indications

Input LEDs	Red	On: Input value is in Overflow	
Status LED	A triple color LED. Indications are as follows:		
	Color	LED State	Status
	Green	On	Operating normally
		Slow blink	Boot
		Rapid blink	OS initialization
	Green/Red	Slow blink	Configuration mismatch
	Red	On	Supply voltage is low or missing
		Slow blink	No IO exchange
		Rapid blink	Communication error
Orange	Rapid Blink	OS Upgrade	


Environmental

Protection	IP20, NEMA1
Operating temperature	-20°C to 55°C (-4°F to 131°F)
Storage temperature	-30°C to 70°C (-22°F to 158°F)
Relative Humidity (RH)	5% to 95% (non-condensing)
Operating altitude	2,000 m (6,562 ft)
Shock	IEC 60068-2-27, 15G, 11ms duration
Vibration	IEC 60068-2-6, 5Hz to 8.4Hz, 3.5mm constant amplitude, 8.4Hz to 150Hz, 1G acceleration


Dimensions	
Weight	0.13 Kg (0.286 lb)
Size	Refer to the images below

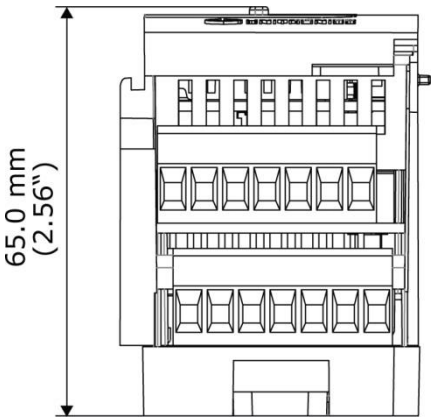

Top View

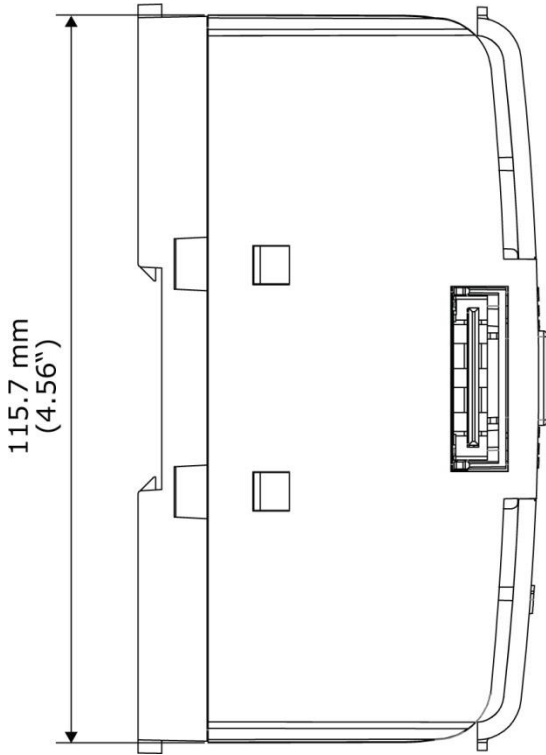

Side View

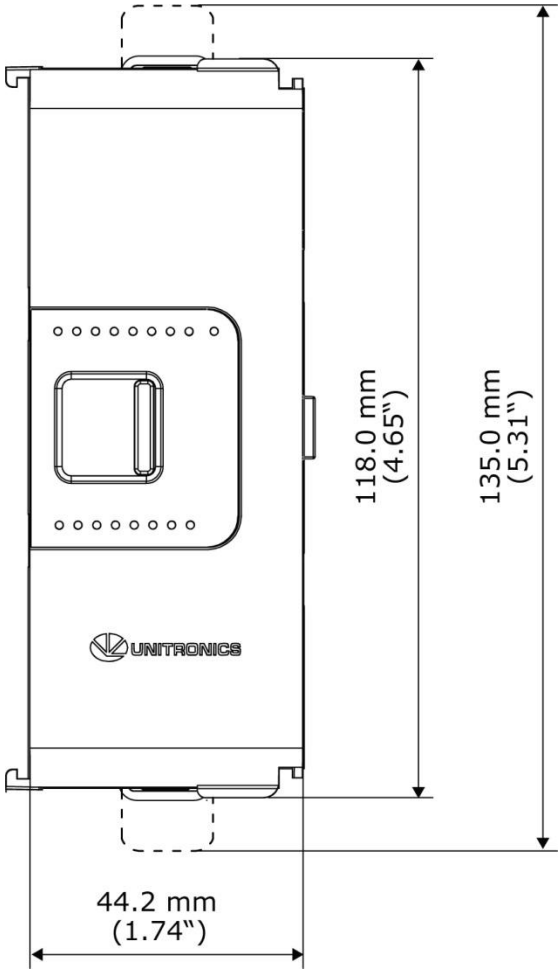

Front View

Notes:

1. The 4-20mA input option is implemented using 0-20mA input range.
2. The UIA-0800NH measures values that are up to 1.5% higher than the nominal input range (i.e. Input Over-range). Note that when the input overflow occurs, it is indicated in the corresponding system tag while the input value is registered as the maximum permissible value. The Over-range values can reach up to 20.3mA, and any input current higher than that will still register as 20.3mA while the Overflow system tag is turned on.
3. Step response and update time are independent of the number of channels that are used.
4. See LED Indications Table above for description of the relevant indications. Note that the diagnostics results are also indicated in the system tags and can be observed through the UniApps™ or the online state of the UniLogic™.

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the foregoing from the market.

All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information.

The tradenames, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R"G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.