

Type: **M22-ESA**

Article No.: **290229**

Sales text **Finger sensor/CPU/relay module**



Power supply/CPU included


Rated operational voltage 24 V DC

Rated operational current 200 mA

Ordering information

Description			Frame: titanium
-------------	--	--	-----------------

Notes concerning the product group

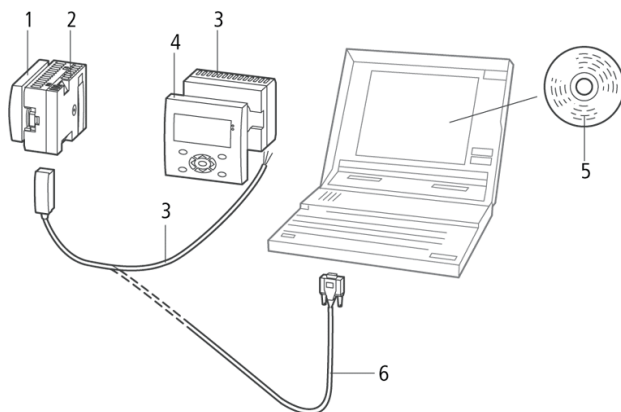

- ① Sensor
- ② CPU
- ③ Power supply unit/communication module MFD-CP4-800 → [274095](#)
- ④ MFD80-B display → [265251](#)
- ⑤ Emulation software
- ⑥ Programming cable → [256277](#)

General

Dimensions			
Front part		W × H × D	65 × 50 × 16 mm
Base unit		B × H × D	76 × 60 × 35 mm

Mounting depth:		mm	45
Weight		kg	0,13
Mounting			2 x 22.5 mm, display is fastened with two fixing screws
Environmental conditions			
Operating ambient temperature		°C	0 – 60
Storage		°C	... 20...+70
Relative humidity, non-condensing (IEC/EN 60068-2-30)		%	5...95
Degree of protection IEC/EN 60529			Front part: IP65, base unit: IP20
Insulation resistance			
Clearance in air and creepage distances			EN 50178, UL 508, CSA 22.2 No 142

Thermal line sensor

Finger
Minutien (Fingerlinien, Enden, Verzweigungen)

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
HPL-C2007G V2.1 © 2007 by Moeller GmbH