


Type: **SV34381**
Article No.: **272058**

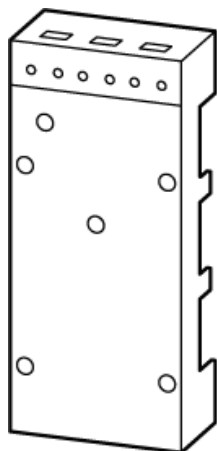

For mounting on 30 × 10, 20 × 10, 20 × 5 mm flat copper busbars and 800/1600 A rigid copper busbars.

Mounting using clamp and screw fixing.

Rated operational voltage U_e : 690 V AC


Connection cable not included as standard.

not UL/CSA approved

Ordering information

Rated current	I_e	A	200
Supply cable/terminal			Round conductor: 6 – 70 mm ² ; Cu-band (n × B × H): 9 × 9 × 0.8
Adapter width		mm	110
For surface mounting of (example)			NZM2 PN2, N2
Terminal compartment W × H		mm	13 × 10
Tightening torque			
Fixing screw		Nm	4 – 6
Terminal screw		Nm	2 – 3
For use with			NZM2, (P)N2

			NZM2
--	--	--	------

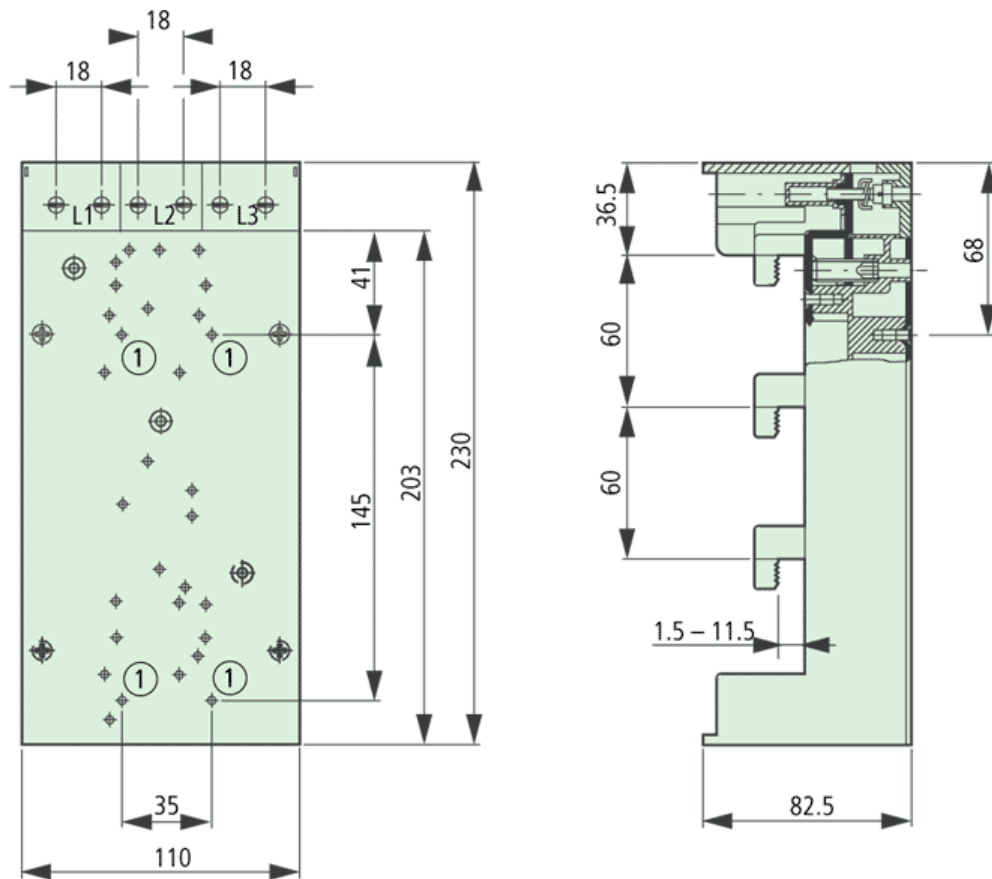

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
 E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
 Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3