


HDC-C-HE-BM0.75-1.00AU**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Crimps provide a electrical and mechanical connection between wire and contact that is both secure and reliable. The optimal crimp connection is gas-tight and corrosion-resistant.

General ordering data

Version	Heavy-duty connectors, Crimp contact, HE, HEE, HQ, MixMate, Female, Conductor cross-section, max.: 1, turned, Copper alloy
Order No.	1651480000
Type	HDC-C-HE-BM0.75-1.00AU
GTIN (EAN)	4008190400156
Qty.	100 pc(s).

HDC-C-HE-BM0.75-1.00AU

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Diameter	4.5 mm	Net weight	1.57 g
----------	--------	------------	--------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	6eabd5ae-2d6b-409e-8bdf-87c27ee1
------------	----------------	------	----------------------------------

General data

Conductor cross-section, max.	1 mm ²	Conductor cross-section, min.	0.75 mm ²
Contact diameter, male Ø	2.5 mm	Contact material	Copper alloy
Cross-section for connected wire	0.75 - 1 mm ²	Material	Copper alloy
Plugging cycles	≥ 500	Production methods	turned
Series	HE	Stripping length, rated connection	7.5 mm
Surface finish	gold	Surface layer thickness, max.	1.25 µm
Surface layer thickness, min.	0.75 µm	Type	Female
Type of connection	Crimp connection	Version insert	HE, HEE, HQ, MixMate
Volume resistance	≤2 mΩ		

Classifications

ETIM 6.0	EC000796	ETIM 7.0	EC000796
ETIM 8.0	EC000796	ECLASS 9.0	27-44-02-04
ECLASS 9.1	27-44-02-04	ECLASS 10.0	27-44-02-04
ECLASS 11.0	27-44-02-04	ECLASS 12.0	27-44-02-04

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

Downloads


Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

HDC-C-HE-BM0.75-1.00AU
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

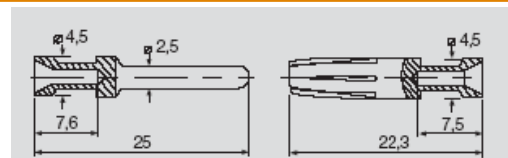www.weidmueller.com
Drawings


Leiterquerschnitt	Abisolierlänge	
0,50 mm ²	AWG 20	7,5 mm
0,75 - 1,00 mm ²	AWG 18	7,5 mm
1,50 mm ²	AWG 16	7,5 mm
2,50 mm ²	AWG 14	7,5 mm
4,00 mm ²	AWG 12	7,5 mm

