

**Neutral conductor, 4th pole, N for P1Z**
**Part no.** N-P1Z  
**Catalog No.** 000652

**EL-Nummer** 0001456566  
**(Norway)**
**Delivery program**

|                            |  |    |                                                                                                                                                                                                                              |
|----------------------------|--|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic function             |  |    | neutral conductor                                                                                                                                                                                                            |
| Function                   |  |    | Switched neutrals                                                                                                                                                                                                            |
|                            |  |    | The N contact always behaves as an early-make contact when switching on and as a late-break contact when switching off.<br>N-P1(P3)... switching capacity same as for contacts P1(P3)-...<br>For left or right side mounting |
| For use with               |  |    | P1-.../Z, .../V, .../I2, .../IVS                                                                                                                                                                                             |
| For use with               |  |    | Rear mounting                                                                                                                                                                                                                |
| <b>Terminal capacities</b> |  |    |                                                                                                                                                                                                                              |
| Stripping length           |  | mm | 10.5                                                                                                                                                                                                                         |

**Design verification as per IEC/EN 61439**

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 32                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 1.8                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 0                                                                                                                                |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 0                                                                                                                                |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 50                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Accessories for low-voltage switch technology (EC002498)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Component for low-voltage switch technology (accessories) (ecl@ss10.0.1-27-37-13-92 [AKN570013])

Type of accessory 4th pole

## Approvals

|                             |                                                                           |
|-----------------------------|---------------------------------------------------------------------------|
| Product Standards           | UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking |
| UL File No.                 | E36332                                                                    |
| UL Category Control No.     | NLRV                                                                      |
| CSA File No.                | 12528                                                                     |
| CSA Class No.               | 3211-05                                                                   |
| North America Certification | UL listed, CSA certified                                                  |

## Dimensions

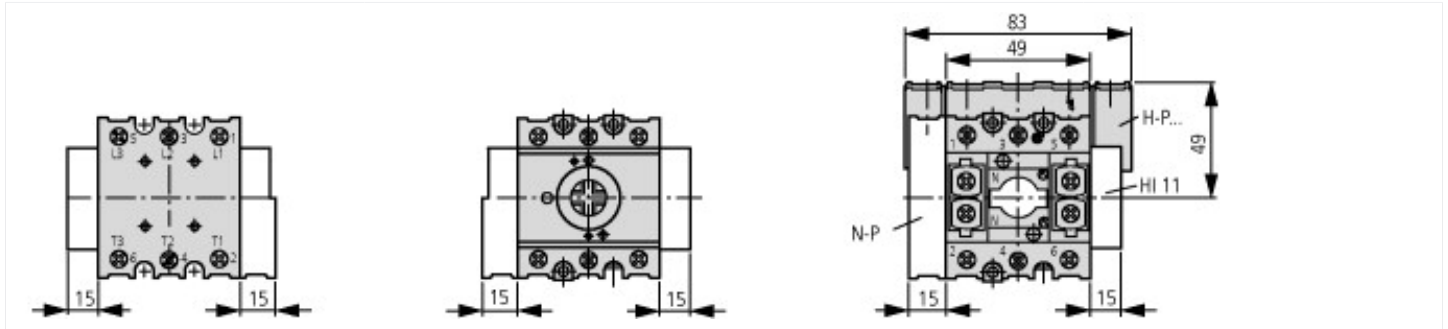

## Additional product information (links)

### IL03802004Z (AWA1150-1891) Switch-disconnectors for rear mounting

|                                                                   |                                                                                                                                                                                                 |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IL03802004Z (AWA1150-1891) Switch-disconnectors for rear mounting | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802004Z2018_05.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802004Z2018_05.pdf</a>               |
| Technical overview cam switch, switch-disconnector                | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2</a>                                     |
| System overview cam switch T                                      | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4</a>                                     |
| System overview switch-disconnector P                             | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6</a>                                     |
| Key to part numbers Cam switch                                    | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Key to part numbers Switch-disconnector                           | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Switches for ATEX                                                 | <a href="http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html">http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html</a> |