



**Insulated enclosure, E-PKZ0, H x W x D = 129 x 90 x 115 mm, flush-mounted**

**Part no.** E-PKZ01  
**Catalog No.** 281633  
**Alternate Catalog No.** XTPBXENCF40  
**EL-Nummer (Norway)** 4365004

## Delivery program

|                                              |  |                                                               |
|----------------------------------------------|--|---------------------------------------------------------------|
| Product range                                |  | Accessories                                                   |
| Subrange                                     |  | Installation enclosures                                       |
| Accessories                                  |  | Insulated enclosures for PKZ                                  |
| Degree of Protection                         |  | Front IP40                                                    |
| For use with                                 |  | PKZM01<br>+NHI-E or VHI-PKZ01<br>+U or A or NHI<br>+L (2 off) |
| <b>Notes</b> With integrated PE(N) terminal. |  |                                                               |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 0                                                                                                                                |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 0                                                                                                                                |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 0                                                                                                                                |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 0                                                                                                                                |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 40                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Please enquire                                                                                                                   |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |

|                           |  |                                                                                                          |
|---------------------------|--|----------------------------------------------------------------------------------------------------------|
| 10.13 Mechanical function |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |
|---------------------------|--|----------------------------------------------------------------------------------------------------------|


## Technical data ETIM 7.0

|                                                                                                                                                                                                                          |    |          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----------|
| Low-voltage industrial components (EG000017) / Empty enclosure for switchgear (EC000712)                                                                                                                                 |    |          |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Empty housing for switch devices (ecI@ss10.0.1-27-37-13-01 [AKN343014]) |    |          |
| Material housing                                                                                                                                                                                                         |    | Plastic  |
| Width                                                                                                                                                                                                                    | mm | 85       |
| Height                                                                                                                                                                                                                   | mm | 129      |
| Depth                                                                                                                                                                                                                    | mm | 80       |
| With transparent cover                                                                                                                                                                                                   |    | No       |
| Suitable for emergency stop                                                                                                                                                                                              |    | No       |
| Model                                                                                                                                                                                                                    |    | Built-in |
| Degree of protection (IP)                                                                                                                                                                                                |    | IP40     |
| Degree of protection (NEMA)                                                                                                                                                                                              |    | Other    |

## Approvals

|                                      |  |                                                    |
|--------------------------------------|--|----------------------------------------------------|
| Product Standards                    |  | UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking |
| UL File No.                          |  | E36332                                             |
| UL Category Control No.              |  | NLRV                                               |
| CSA File No.                         |  | 165628                                             |
| CSA Class No.                        |  | 3211-05                                            |
| North America Certification          |  | UL listed, CSA certified                           |
| Specially designed for North America |  | No                                                 |

## Dimensions

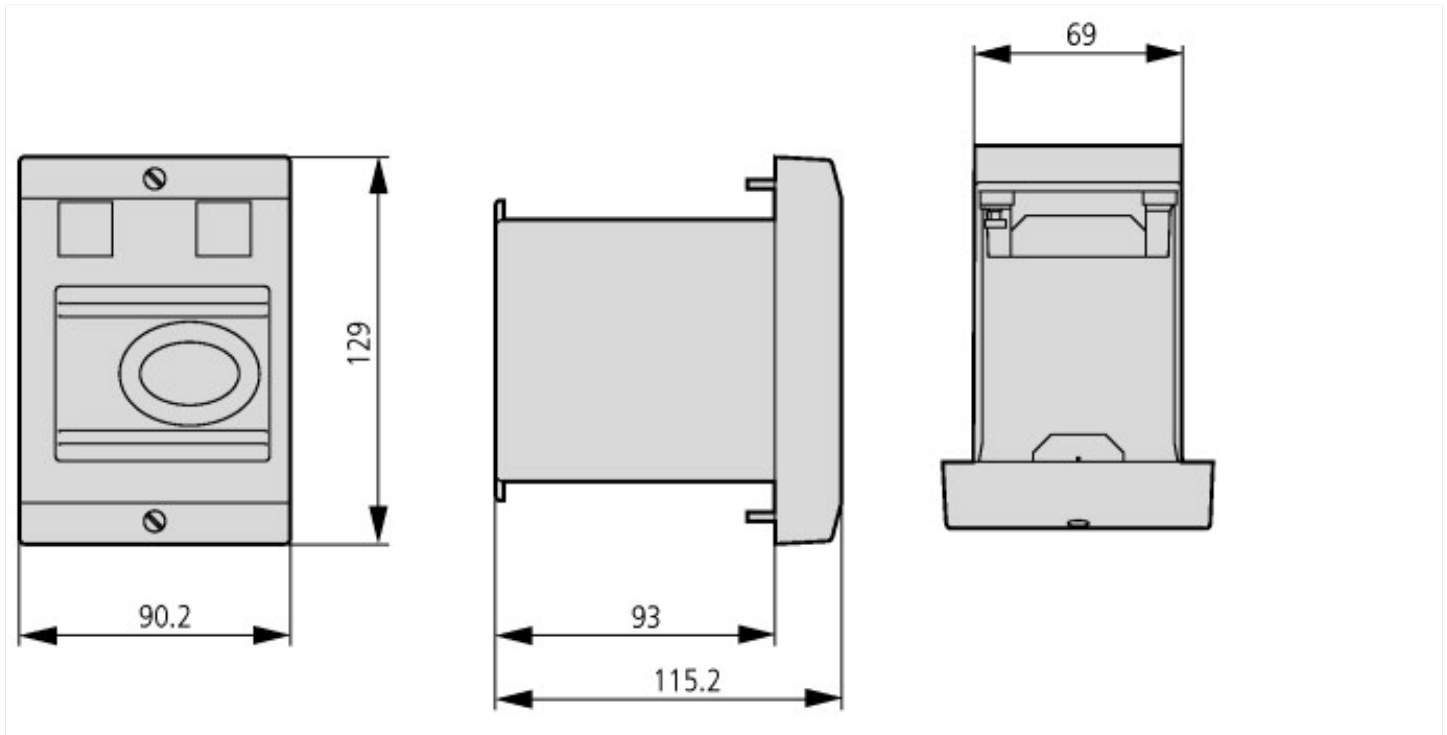

## Additional product information (links)

|                                                                                                          |                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IL03407018Z (AWA1210-2134) Enclosures surface/flush mounting for Motor-protective circuit-breaker</b> |                                                                                                                                                                                                                 |
| IL03407018Z (AWA1210-2134) Enclosures surface/flush mounting for Motor-protective circuit-breaker        | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407018Z2020_02.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407018Z2020_02.pdf</a>                               |
| Motor starters and "Special Purpose Ratings" for the North American market                               | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                           | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>                                                                               |

