



Earth-leakage circuit-breakers 300 mA

Part no. **PFR-03**
Catalog No. **285556**

Similar to illustration

Delivery program

Rated fault currents	$I_{\Delta n}$	A	0.3
Description			Pulse-current sensitive Integrated auxiliary contact (1 C/O) Ring-type transformer must also be ordered not UL/CSA approved
Rated control voltage	U_s	V	230 V AC 50/60Hz

Technical data

Electrical

Standards			IEC/EN 60947-2, IEC 755, IEC 1008, IEC 1009
Sensitivity			Pulse current sensitive, type A
Rated control voltage	U_s	V AC	230 ±20 % (50/60 Hz)
Motor rating	P_e	W	3
Rated fault currents	$I_{\Delta n}$	A	0.3
Delay time	t_v	s	0.02 (non-delayed)
Relay contacts			1 integrated changeover contact
Rated voltage of the relay contact		V AC/DC	250/100
Rated current of the relay contact		A	6

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	85
Device width		mm	45
Mounting			Snap fixing, top-hat rail DIN 46277, IEC/EN 60715
Terminals top and bottom			Box terminals
Terminal protection			Finger/back-of-hand proof to BGV A2, VDE 106 part 100
Terminal capacities		mm ²	2 x 0.75 - 2.5 solid, 2 x 0.75 - 1.5 flexible/with ferrules

Ambient temperature

Operation		°C	-10 - +50
-----------	--	----	-----------

Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Residual current release for power circuit breaker (EC001021)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Fault current switch for circuit breakers (ecl@ss10.0.1-27-37-04-11 [AKF009013])

Rated control supply voltage U_s at AC 50HZ	V	184 - 276
Rated control supply voltage U_s at AC 60HZ	V	184 - 276
Rated control supply voltage U_s at DC	V	0 - 0
Rated fault current	A	0.3 - 0.3
Max. power on-delay time	ms	20
Delay adjustable		No
Max. rated operation voltage U_e	V	276

Dimensions

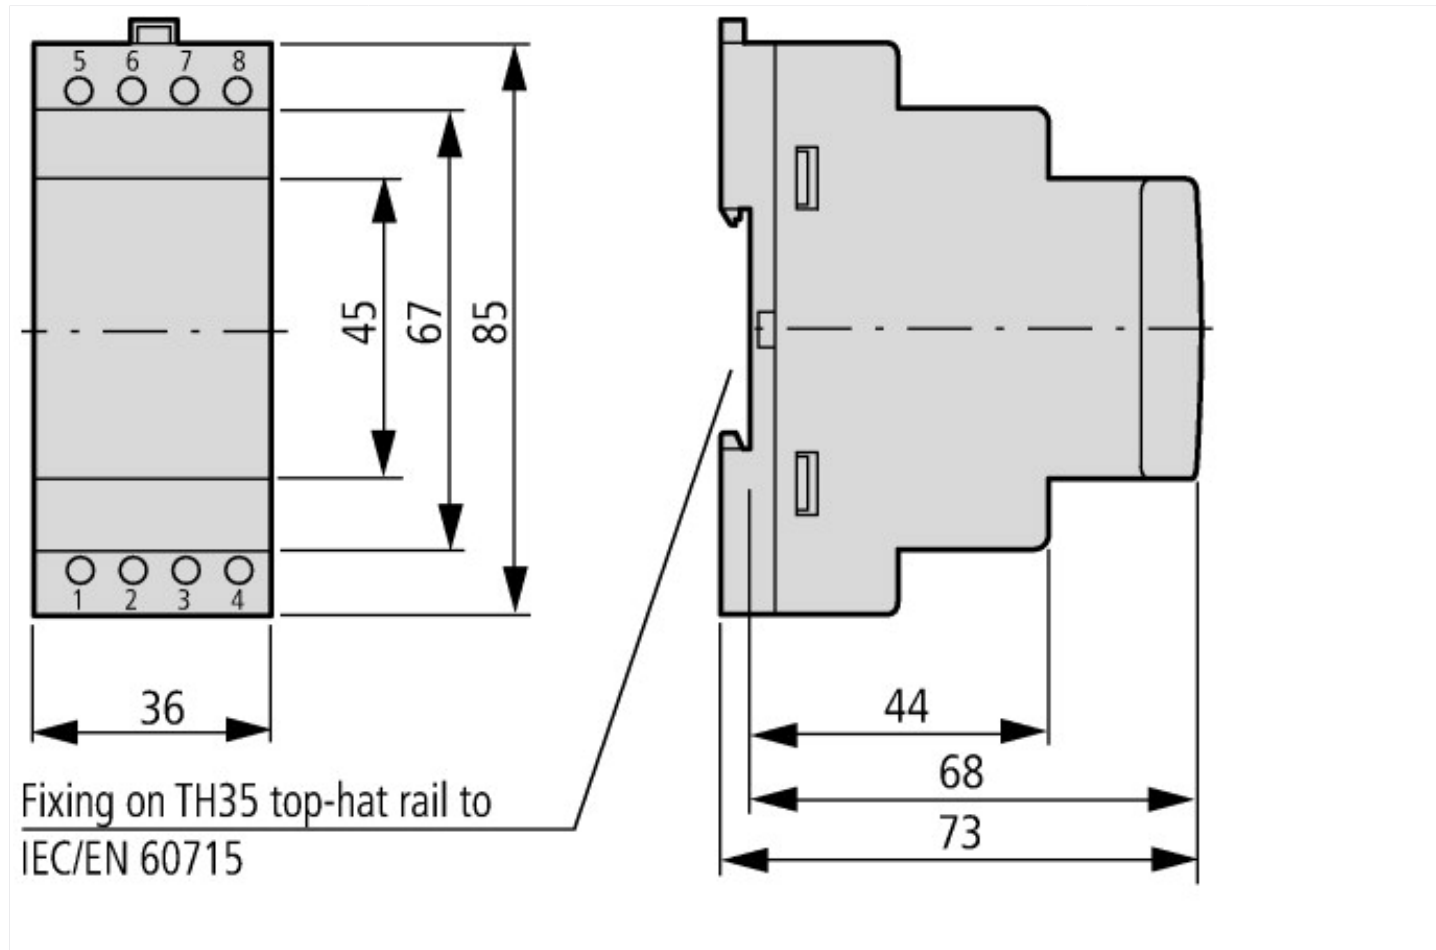

Additional product information (links)

IL01219036Z (AWA1230-2214) Residual-current relay: converter for earth-leakage circuit-breaker

IL01219036Z (AWA1230-2214) Residual-current relay: converter for earth-leakage circuit-breaker

https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219036Z2011_01.pdf