

Type: **M22-ESA-1**

Article No.: **290240**

Sales text **Finger sensor M22-ESA**



In connection with CPU/Power Supply

Rated operational voltage 24 V DC

Rated operational current 200 mA

Thermal line sensor for fingerprint recognition


Max. 100 memory locations

Ordering information

Description

Frame: titanium

Notes concerning the product group

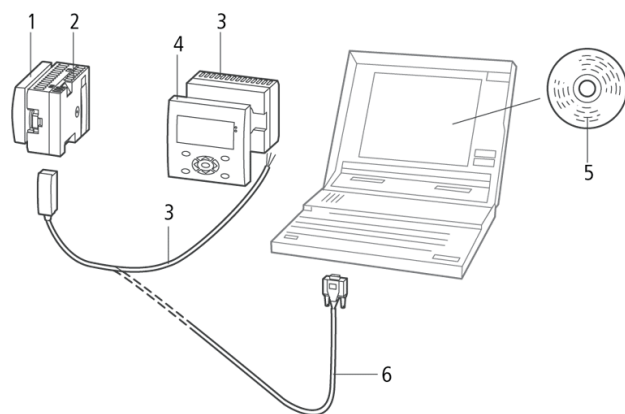

① Sensor

② CPU

③ Power supply unit/communication module MFD-CP4-800 → [274095](#)

④ MFD80-B display → [265251](#)

⑤ Emulation software

⑥ Programming cable → [256277](#)

General

Dimensions

Front part

65 × 50 × 16 mm

		W × H × D	
Base unit		B × H × D	76 × 60 × 35 mm
Mounting			2 × 22.5 mm, display is fastened with two fixing screws

Environmental conditions

Operating ambient temperature		°C	0 – 60
Storage		°C	... 20...+70
Relative humidity, non-condensing (IEC/EN 60068-2-30)		%	5...95
Degree of protection IEC/EN 60529			Front part: IP65, base unit: IP20

Insulation resistance

Clearance in air and creepage distances			EN 50178, UL 508, CSA 22.2 No 142
---	--	--	--------------------------------------

Thermal line sensor

Finger
Minutien (Fingerlinien, Enden, Verzweigungen)

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
HPL-C2007G V2.1 © 2007 by Moeller GmbH