

Busbar adapter, 3p, for NZM1, 160A, UL508

Part no. NZM1-XAD160
Catalog No. 104554

EL-Nummer (Norway) 0002465043



Delivery program

Product range			60 mm system Compact system			
Basic function			Busbar adapters for NZM			
Subrange			Component adapter for circuit-breakers and switch-disconnectors			
Function			For surface mounting on flat copper busbars 12 – 30 x 5 – 10, double T and triple T profile			
Rated operational voltage	U _e	V AC	690			
Temperature resistant			to 120°C			
Rated diversity factor			Interior housing temperature NZM1 ≤ 125 A RDF	25° C	35° C	45° C
			NZM1 160 A RDF	1.00	1.00	0.92
				1.00	0.94	0.88
						0.81
			IEC 61439: busbar ≥ 120 mm ²			
Self-extinguishing			to UL 94			
Track resistance			CTI 200			
Number of poles			3 pole			
Rated operational current	I _e	A	160			
Adapter width		mm	92			
For use with			NZM1, PN1, N(S)1			
Cu factor		kg	0,25			

Notes

For switch and standard connection with box terminal.

Integrated adapters allow connection to system on top or bottom.

Increased protection against direct contact on the switch output side is possible in conjunction with IP2X protection against contact with a finger.

Latch fitting to busbar using combination stand

Can be adjusted to 5-mm and 10-mm rail thicknesses and back thanks to the integrated combination stand.


Rated short-circuit switching capacity 35 kA at 480 V.

Mounted by latching onto de-energized busbar.

Approvals

Product Standards			UL508A; CSA-C22.2 No. 14; IEC 61439-1; CE marking
UL File No.			E140305
UL Category Control No.			DIHS, DIHS7
CSA File No.			236217
CSA Class No.			3211-37
North America Certification			UL listed, CSA certified
Conditions of Acceptability			Refer to approbation report
Specially designed for North America			No
Suitable for			Feeder circuits
Current Limiting Circuit-Breaker			Refer to approbation report
Max. Voltage Rating			600 V AC

Dimensions

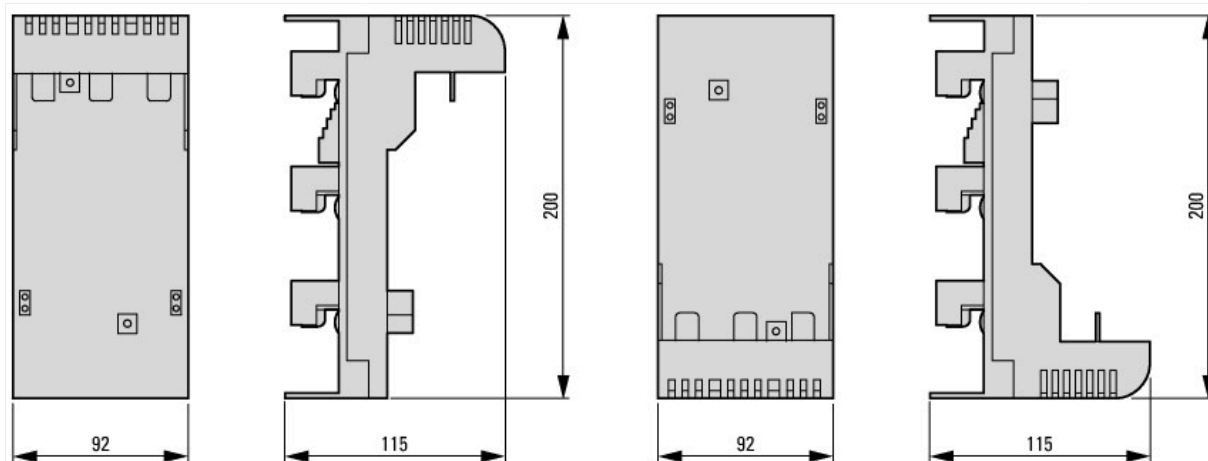

Additional product information (links)

IL01502144Z Component adapter for circuit-breakers and switch-disconnectors

IL01502144Z Component adapter for circuit-breakers and switch-disconnectors

https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01502144Z2012_04.pdf