



Fuse-link, NH00, 50A, 500 V, gL/gG

Part no.

Catalog No.

Z-NH-00/50

290004

Similar to illustration


Delivery program


Product range			60 mm system 185 mm system
Basic function			Low-voltage h.b.c. fuse links
			Insulation body made from Steatite/Corderite Copper contact blade with silver coating, corrosion proof Pivoting and central indicator, live grip tabs Selectivity from 1:1.6
Frame size			00
Rated operational current	I _e	A	50

Technical data

Electrical

Standards			IEC 60269 VDE 0636 SEV1086
Rated operational voltage	U _e	V	
	U _e	V AC	
Rated operating voltage	U _e	V AC	500
Rated frequency	f	Hz	45 – 62

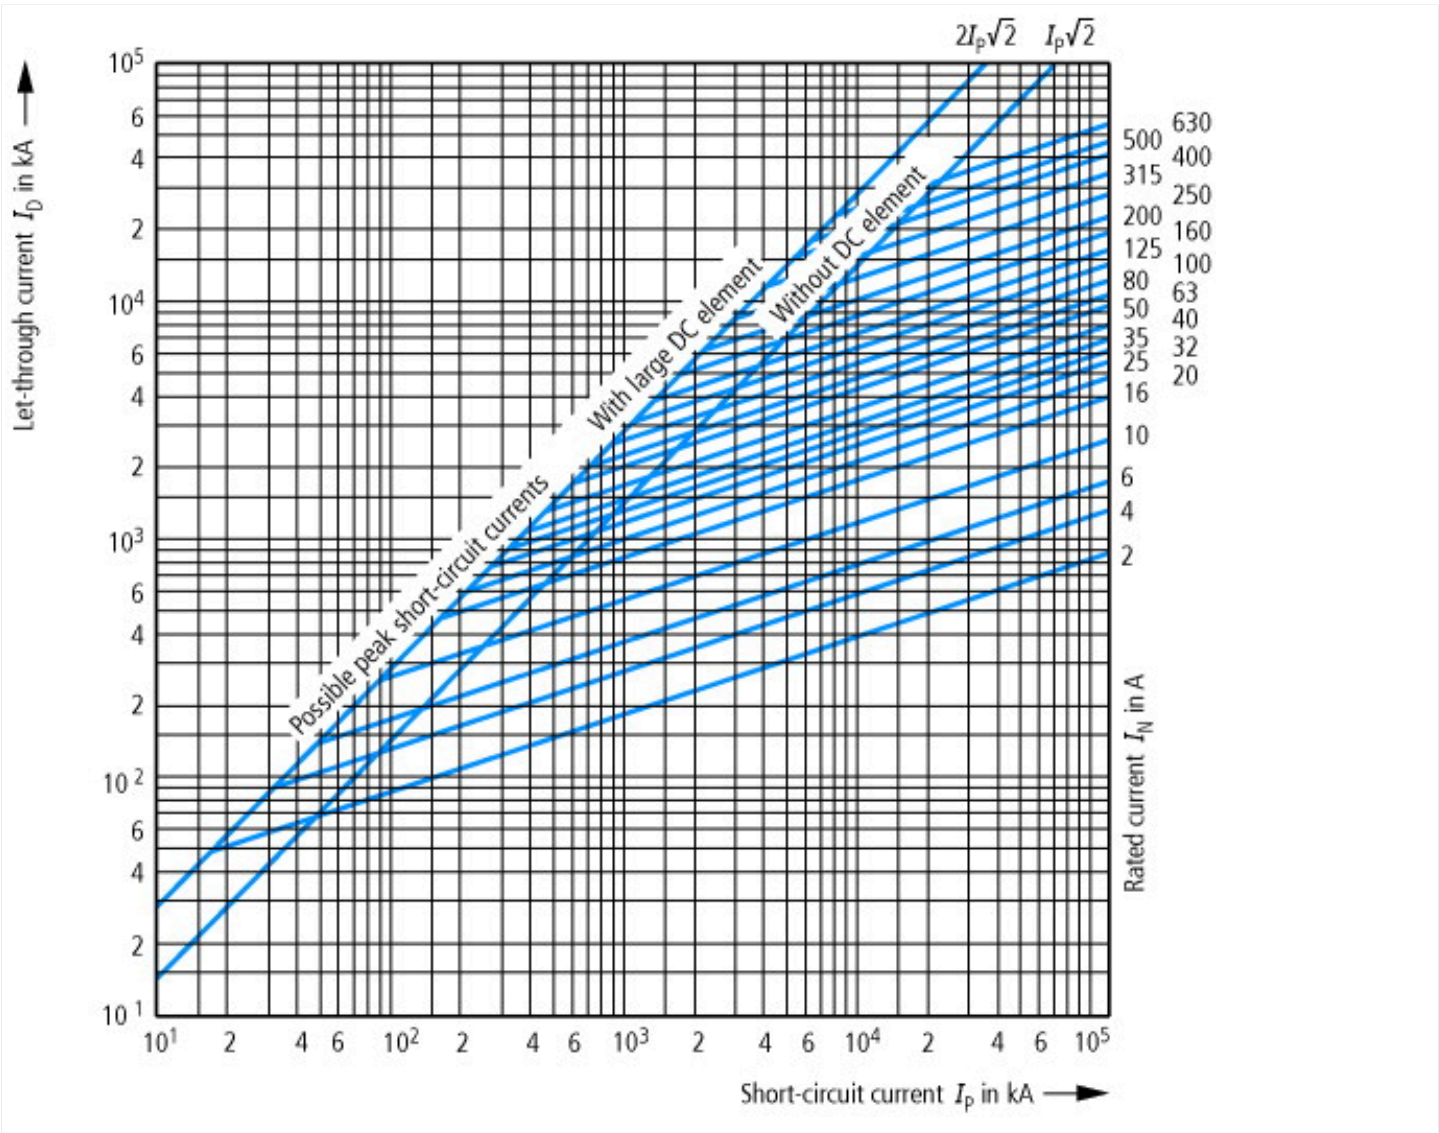

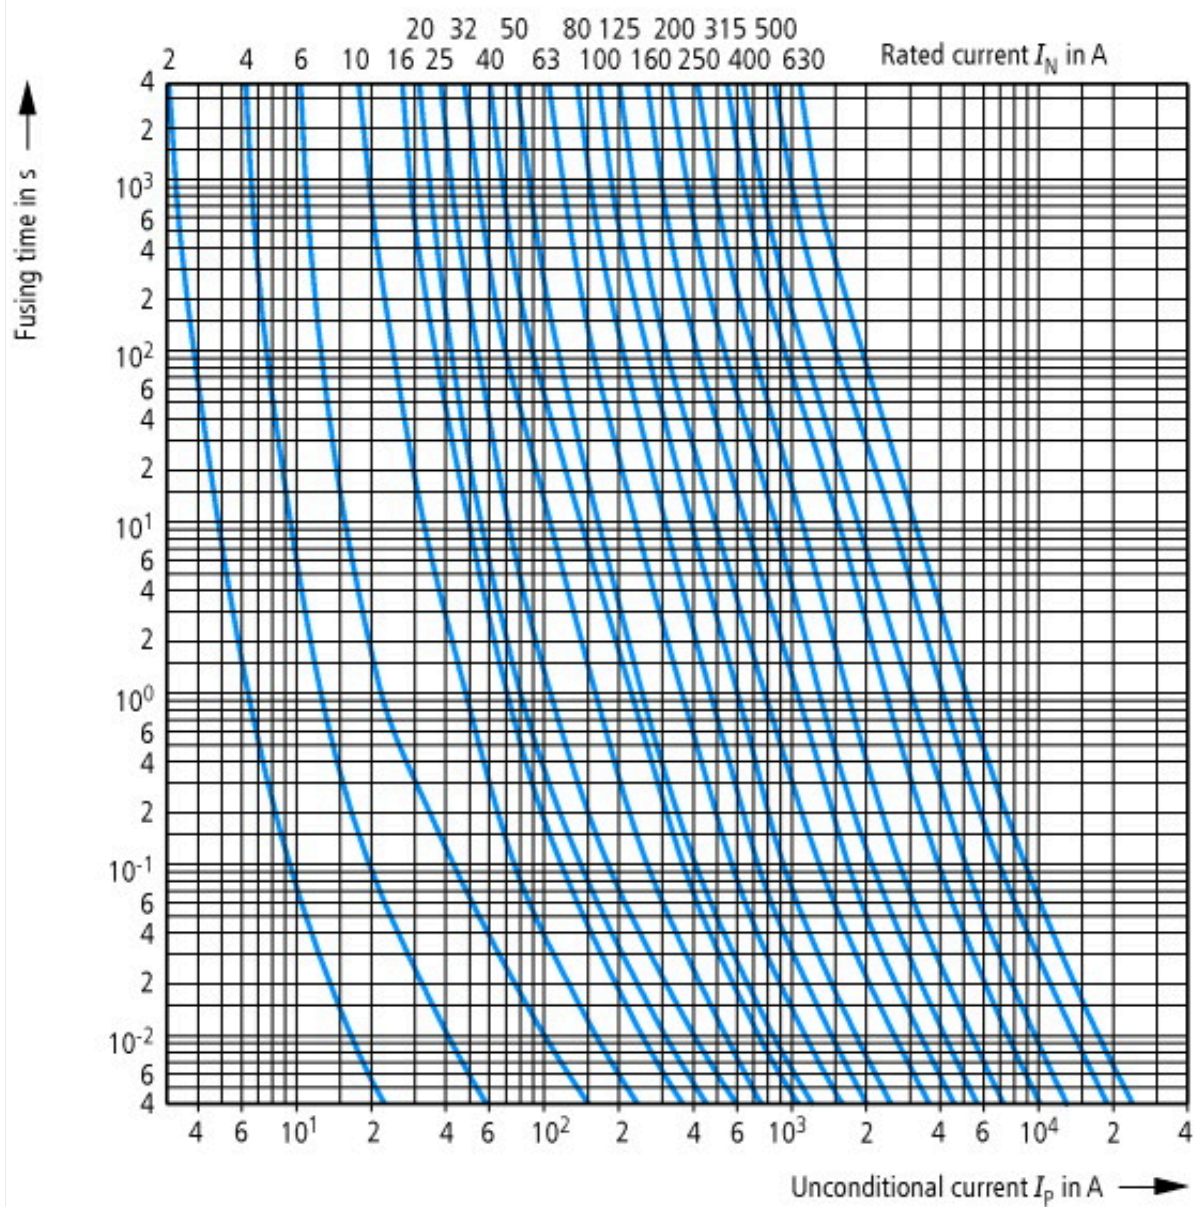

Time-current characteristic

Dimensions

