
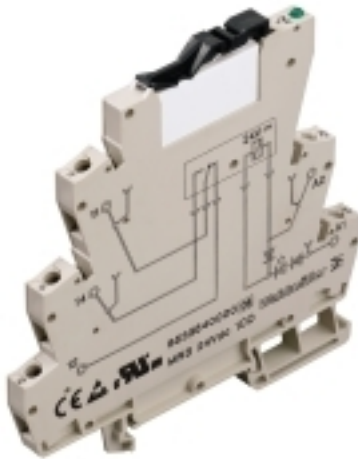


MRS 120VUC 1CO RC C1D2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

General ordering data

Version	MICROSERIES, Relay module, Number of contacts: 1, CO contact AgNi, Rated control voltage: 120 V AC + 10 % / -15 %, Continuous current: 6 A, Screw connection, Test button available: No
Order No.	8967370000
Type	MRS 120VUC 1CO RC C1D2
GTIN (EAN)	4032248788989
Qty.	10 pc(s).
Delivery status	Discontinued
Available until	2016-09-30
Alternative product	1984590000

Creation date November 17, 2022 11:35:50 PM CET

MRS 120VUC 1CO RC C1D2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	94 mm	Depth (inches)	3.701 inch
Height	93 mm	Height (inches)	3.661 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	37.5 g		

Temperatures

Storage temperature	-40 °C...60 °C	Operating temperature	-25 °C...55 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Control side

Rated control voltage	120 V AC + 10 % / -15 %	Rated current AC	7 mA
Power rating	0.84 VA	Pull-in/drop-out voltage, typ.	60 V / 37 V AC
Pull-in/drop-out current, typ.	4.5 mA / 3.7 mA AC	Status indicator	Green LED
Protective circuit	Rectifier, RC element	RC filter	94 Ω / 100 nF

Load side

Rated switching voltage	250 V AC	Continuous current	6 A
Max. switching frequency at rated load	0.1 Hz	Max. switching voltage, AC	250 V
Max. switching voltage, DC	250 V	Inrush current	6 A
AC switching capacity (resistive), max.	1500 VA	DC switching capacity (resistive), max.	144 W @ 24 V
Switch-on delay	< 13 ms	Switch-off delay	< 22 ms
Contact type	1 CO contact (AgNi)	Mechanical service life	5 x 10 ⁶ switching cycles
Min. switching power	1 mA @ 24 V, 10 mA @ 10 V, 100 mA @ 5 V		

General data

Version	cULus C1D2	Rail	TS 35
Test button available	No	Mechanical switch position indicator	No
Colour	beige		

Insulation coordination

Rated voltage	300 V	Pollution severity	2
Surge voltage category	III	Creepage and clearance distance input – output	≥ 5.5 mm
Dielectric strength, Input/Output	4 kV _{eff} / 1 s	Dielectric strength to mounting rail	4 kV _{eff} / 1 Min.
Impulse withstand voltage	4 kV (1.2/50 μs)	Protection degree	IP20

Further details of approvals / standards

Standards	UL508
-----------	-------

MRS 120VUC 1CO RC C1D2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Connection data**

Wire connection method	Screw connection	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	4 mm ²
Blade size	0.6 x 3.5 mm		

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ETIM 8.0	EC001437	ECLASS 9.0	27-37-16-01
ECLASS 9.1	27-37-16-01	ECLASS 10.0	27-37-16-01
ECLASS 11.0	27-37-16-01	ECLASS 12.0	27-37-16-01

Approvals

Approvals



ROHS	Conform
Certificate no. (cULusEX)	E223527

Downloads

Engineering Data	EPLAN, WSCAD
Catalogues	Catalogues in PDF-format


MRS 120VUC 1CO RC C1D2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Wiring diagram

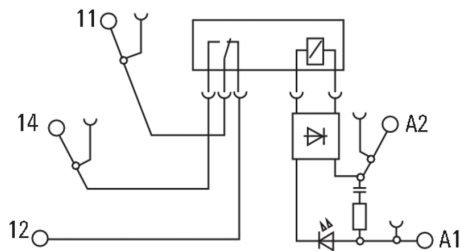

Graph

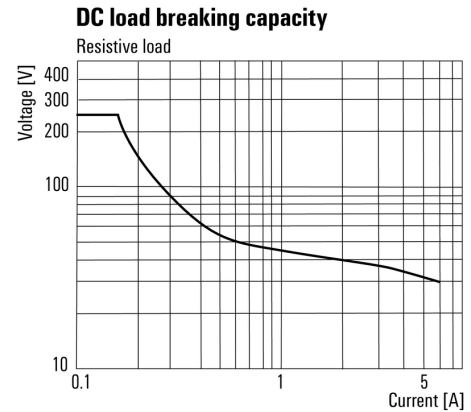

DC load limit curve

