




Reference: TF140DU-110  
Code: 1SAZ431201R1002

TF140DU-110 Thermal Overload Relay

Buy it at Electric Automation Network

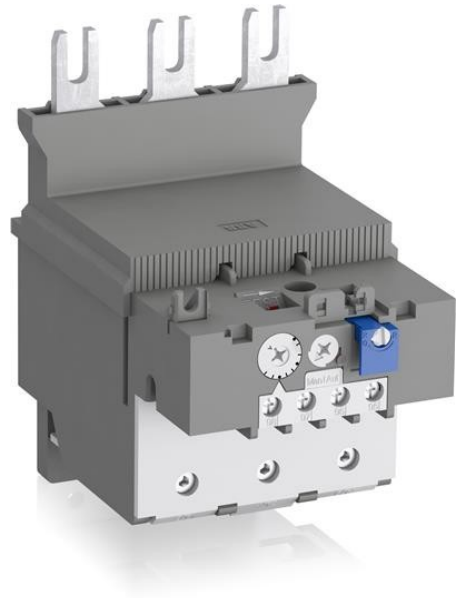

The TF140DU-110 thermal overload relay is an economic electromechanical protection device for the main circuit. It offers reliable and fast protection for motors in the event of overload or phase failure. The device has trip class 10A. Further features are the temperature compensation, trip contact (NC), signal contact (NO), automatic- or manual reset selectable, trip-free mechanism, STOP- and Test function and a trip indication. The overload relays are connected directly to the block contactors.

### Ordering

|                         |               |
|-------------------------|---------------|
| EAN:                    | 4013614446825 |
| Minimum Order Quantity: | 1 piece       |
| Customs Tariff Number:  | 85364900      |

### Dimensions

|                     |         |
|---------------------|---------|
| Product Net Width:  | 89 mm   |
| Product Net Height: | 140 mm  |
| Product Net Depth:  | 126 mm  |
| Product Net Weight: | 0.82 kg |

### Container Information

|                        |         |
|------------------------|---------|
| Package Level 1 Units: | 1 piece |
|------------------------|---------|

|                               |               |
|-------------------------------|---------------|
| Package Level 1 Width:        | 165 mm        |
| Package Level 1 Height:       | 133 mm        |
| Package Level 1 Length:       | 151 mm        |
| Package Level 1 Gross Weight: | 0.945 kg      |
| Package Level 2 Units:        | 4 piece       |
| Package Level 2 Width:        | 280 mm        |
| Package Level 2 Height:       | 210 mm        |
| Package Level 2 Length:       | 395 mm        |
| Package Level 2 Gross Weight: | 8.786 kg      |
| Package Level 2 EAN:          | 4013614494369 |

## Technical

|                                                     |                                                                                                                                                                                        |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Setting Range:                                      | 80 ... 110 A                                                                                                                                                                           |
| Rated Operational Voltage:                          | Auxiliary Circuit 440 V DC<br>Auxiliary Circuit 500 V AC<br>Main Circuit 690 V AC                                                                                                      |
| Rated Operational Current ( $I_e$ ):                | 110 A                                                                                                                                                                                  |
| Rated Operational Current AC-3 ( $I_e$ ):           | 110 A                                                                                                                                                                                  |
| Rated Frequency (f):                                | Auxiliary Circuit 50 Hz<br>Auxiliary Circuit 60 Hz<br>Auxiliary Circuit DC<br>Main Circuit 60 Hz<br>Main Circuit 50 Hz<br>Main Circuit DC                                              |
| Rated Impulse Withstand Voltage ( $U_{imp}$ ):      | Auxiliary Circuit 6 kV<br>Main Circuit 8 kV                                                                                                                                            |
| Rated Insulation Voltage ( $U_i$ ):                 | 690 V                                                                                                                                                                                  |
| Number of Poles:                                    | 3                                                                                                                                                                                      |
| Number of Auxiliary Contacts NC:                    | 1                                                                                                                                                                                      |
| Number of Auxiliary Contacts NO:                    | 1                                                                                                                                                                                      |
| Number of Protected Poles:                          | 3                                                                                                                                                                                      |
| Conventional Free-air Thermal Current ( $I_{th}$ ): | Auxiliary Circuit NC 10 A<br>Auxiliary Circuit NO 6 A                                                                                                                                  |
| Rated Operational Current AC-15 ( $I_e$ ):          | (120 V) NC 3 A<br>(120 V) NO 1.5 A<br>(240 V) NC 3 A<br>(240 V) NO 1.5 A<br>(400 V) NC 1.9 A<br>(400 V) NO 1 A<br>(440 V) NC 1 A<br>(440 V) NO 1 A<br>(500 V) NC 1 A<br>(500 V) NO 1 A |

|                                            |                                                                                                                                                                                                           |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Operational Current DC-13 ( $I_e$ ): | (125 V) NC 0.25 A<br>(125 V) NO 0.25 A<br>(24 V) NC 1.25 A<br>(24 V) NO 1.25 A<br>(250 V) NC 0.12 A<br>(250 V) NO 0.04 A<br>(60 V) NC 0.25 A<br>(60 V) NO 0.25 A                                          |
| Degree of Protection:                      | Housing IP20<br>Main Circuit Terminals IP10                                                                                                                                                               |
| Pollution Degree:                          | 3                                                                                                                                                                                                         |
| Connecting Capacity-Auxiliary Circuit:     | Flexible with Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Rigid 1/2x 0.75 ... 4 mm <sup>2</sup>                                                            |
| Connecting Capacity-Main Circuit:          | Flexible with Ferrule 1/2x 16 ... 70 mm <sup>2</sup><br>Flexible with Insulated Ferrule 1/2x 16 ... 70 mm <sup>2</sup><br>Flexible 1/2x 16 ... 70 mm <sup>2</sup><br>Rigid 1/2x 16 ... 70 mm <sup>2</sup> |
| Tightening Torque:                         | Auxiliary Circuit 0.8 ... 1.2 N·m<br>Main Circuit 8 ... 10 N·m                                                                                                                                            |
| Wire Stripping Length:                     | Auxiliary Circuit 9 mm<br>Main Circuit 25 mm                                                                                                                                                              |
| Recommended Screw Driver:                  | Auxiliary Circuit Pozidriv 2<br>Main Circuit Hexagon 4                                                                                                                                                    |
| Mounting Position:                         | Position 1 to 5                                                                                                                                                                                           |
| Power Loss:                                | at Rated Operating Conditions per Pole 2.4 ... 4.6 W                                                                                                                                                      |
| Suitable For:                              | AF116<br>AF140                                                                                                                                                                                            |
| Standards:                                 | IEC/EN 60947-1<br>IEC/EN 60947-4-1<br>IEC/EN 60947-5-1<br>UL 60947-1<br>UL 60947-4-1                                                                                                                      |

## Environmental

|                                             |                                                                                            |
|---------------------------------------------|--------------------------------------------------------------------------------------------|
| Ambient Air Temperature:                    | Operation -25 ... +55 °C<br>Operation Compensated -25 ... +55 °C<br>Storage -40 ... +70 °C |
| Ambient Air Temperature Compensation:       | Yes                                                                                        |
| Maximum Operating Altitude Permissible:     | 2000 m                                                                                     |
| Resistance to Shock acc. to IEC 60068-2-27: | 11 ms Pulse 12g                                                                            |
| RoHS Status:                                | Following EU Directive 2002/95/EC August 18, 2005 and amendment                            |

## Technical UL/CSA

|                                   |                       |
|-----------------------------------|-----------------------|
| Maximum Operating Voltage UL/CSA: | Main Circuit 600 V AC |
| Ampere Rating UL/CSA:             | 110 A                 |

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Contact Rating UL/CSA:                        | (NC:) B600<br>(NO:) C300                                   |
| Connecting Capacity Main Circuit UL/CSA:      | Flexible 1/2x 6 ... 2/0 AWG<br>Stranded 1/2x 6 ... 2/0 AWG |
| Connecting Capacity Auxiliary Circuit UL/CSA: | Flexible 1/2x 18 ... 14 AWG<br>Stranded 1/2x 18 ... 14 AWG |
| Tightening Torque UL/CSA:                     | Auxiliary Circuit 12 in·lb                                 |

## Certificates and Declarations (Document Number)

|                                 |                  |
|---------------------------------|------------------|
| ABS Certificate:                | 1SAA941004-0101  |
| BV Certificate:                 | 1SAA941003-0201  |
| CB Certificate:                 | 1SAA941012-2001  |
| CCC Certificate:                | 1SAA941009-3801  |
| cUL Certificate:                | cUL_E48139       |
| Declaration of Conformity - CE: | 1SAD938502-0185  |
| DNV Certificate:                | 1SAA941004-0301  |
| EAC Certificate:                | 1SAA941002-2701  |
| GOST Certificate:               | 1SAA941001-2701  |
| LR Certificate:                 | 1SAA941004-0501  |
| RINA Certificate:               | RINA_ELE098115XG |
| RoHS Information:               | 1SAA941006-4403  |
| UL Certificate:                 | UL_E48139        |

## Classifications

|                             |                                   |
|-----------------------------|-----------------------------------|
| Object Classification Code: | F                                 |
| eClass:                     | 7.0 27371501                      |
| ETIM 4:                     | EC000106 - Thermal overload relay |
| ETIM 5:                     | EC000106 - Thermal overload relay |
| UNSPSC:                     | 39121521                          |