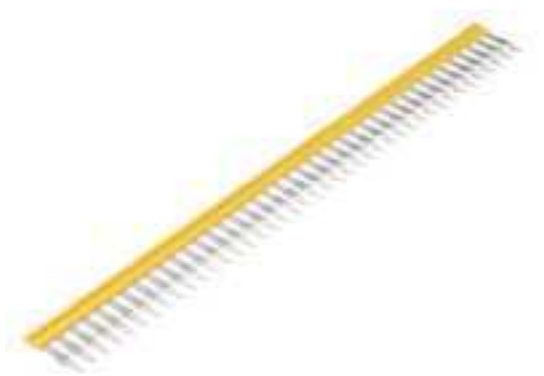


**ZQV 4N/41****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Version             | W-Series, Cross-connector, 32 A                                |
| Order No.           | <a href="#">1758270000</a>                                     |
| Type                | ZQV 4N/41                                                      |
| GTIN (EAN)          | 4032248169801                                                  |
| Qty.                | 10 pc(s).                                                      |
| Delivery status     | <b>This article will no longer be available in the future.</b> |
| Available until     | 2021-12-31                                                     |
| Alternative product | <a href="#">2883810000</a>                                     |

Creation date November 18, 2022 10:50:28 PM CET

Catalogue status 04.11.2022 / We reserve the right to make technical changes.

**ZQV 4N/41****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 25.7 mm  | Depth (inches)  | 1.012 inch |
| Height     | 248.8 mm | Height (inches) | 9.795 inch |
| Width      | 2.8 mm   | Width (inches)  | 0.11 inch  |
| Net weight | 2 g      |                 |            |

**Temperatures**

|                                  |                |                                  |     |
|----------------------------------|----------------|----------------------------------|-----|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -60 |
| Continuous operating temp., max. | 130            |                                  |     |

**Material data**

|                           |       |        |        |
|---------------------------|-------|--------|--------|
| Material                  | Wemid | Colour | yellow |
| UL 94 flammability rating | V-0   |        |        |

**System specifications**

|         |                   |
|---------|-------------------|
| Version | For the terminals |
|---------|-------------------|

**Additional technical data**

|                |         |
|----------------|---------|
| Type of fixing | Plugged |
|----------------|---------|

**Cross-connector**

|                       |                 |                           |      |
|-----------------------|-----------------|---------------------------|------|
| Rated current, 2-pole | 32 A            | Rated current, multi-pole | 32 A |
| Type                  | Cross-connector |                           |      |

**Dimensions**

|                 |        |
|-----------------|--------|
| Pitch in mm (P) | 6.1 mm |
|-----------------|--------|

**General**

|                 |    |
|-----------------|----|
| Number of poles | 41 |
|-----------------|----|

**Rating data**

|               |      |
|---------------|------|
| Rated current | 32 A |
|---------------|------|

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000489    | ETIM 7.0    | EC000489    |
| ETIM 8.0    | EC000489    | ECLASS 9.0  | 27-14-11-40 |
| ECLASS 9.1  | 27-14-11-40 | ECLASS 10.0 | 27-14-11-40 |
| ECLASS 11.0 | 27-14-11-40 | ECLASS 12.0 | 27-14-11-40 |

**Important note**

|                     |                                                                                                                                                                                                                                                                                                        |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product information | Attention: not finger-safe; not suitable for ATEX useDue to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400VThe voltage reduced to 25V if cut cross connection with blank cut edges are used |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**ZQV 4N/41****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**Approval/Certificate/Document of  
Conformity[EAC certificate](#)

Engineering Data

[CAD data – STEP](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)

User Documentation

[StorageConditionsTerminalBlocks](#)  
[BPZL ZQV 2.5](#)

Catalogues

[Catalogues in PDF-format](#)