



Busbar adapter, 3p, for NZM2, 250A, UL508

Part no. NZM2-XAD250
Catalog No. 104555

EL-Nummer 2465044
(Norway)

Delivery program

Product range			60 mm system Compact system
Basic function			Busbar adapters for NZM
Subrange			Component adapter for circuit-breakers and switch-disconnectors
Function			For surface mounting on flat copper busbars 12 – 30 x 5 – 10, double T and triple T profile
Rated operational voltage	U_e	V AC	690
Temperature resistant			to 120°C
Self-extinguishing			to UL 94
Track resistance			CTI 200
Number of poles			3 pole
Rated operational current	I_e	A	250
Adapter width		mm	106
For use with			NZM2, PN2, N(S)2
Cu factor		kg	0,32

Notes

Connection to the system possible at top or bottom via connection on rear (+)NZM2-XKR4...

Mounting using clamp and screw fixing.


Rated short-circuit switching capacity 65 kA at 480 V, 50 kA at 600 V.

Mounted by latching onto de-energized busbar.

Approvals

Product Standards			UL508A; CSA-C22.2 No. 14; IEC 60439-1; CE marking
UL File No.			E300273
UL Category Control No.			NMTR, NMTR7
CSA File No.			236217
CSA Class No.			3211-37
North America Certification			UL listed, CSA certified
Conditions of Acceptability			Refer to approbation report
Specially designed for North America			No
Suitable for			Feeder circuits
Current Limiting Circuit-Breaker			Refer to approbation report
Max. Voltage Rating			600 V AC
Degree of Protection			Feeder circuits

Dimensions

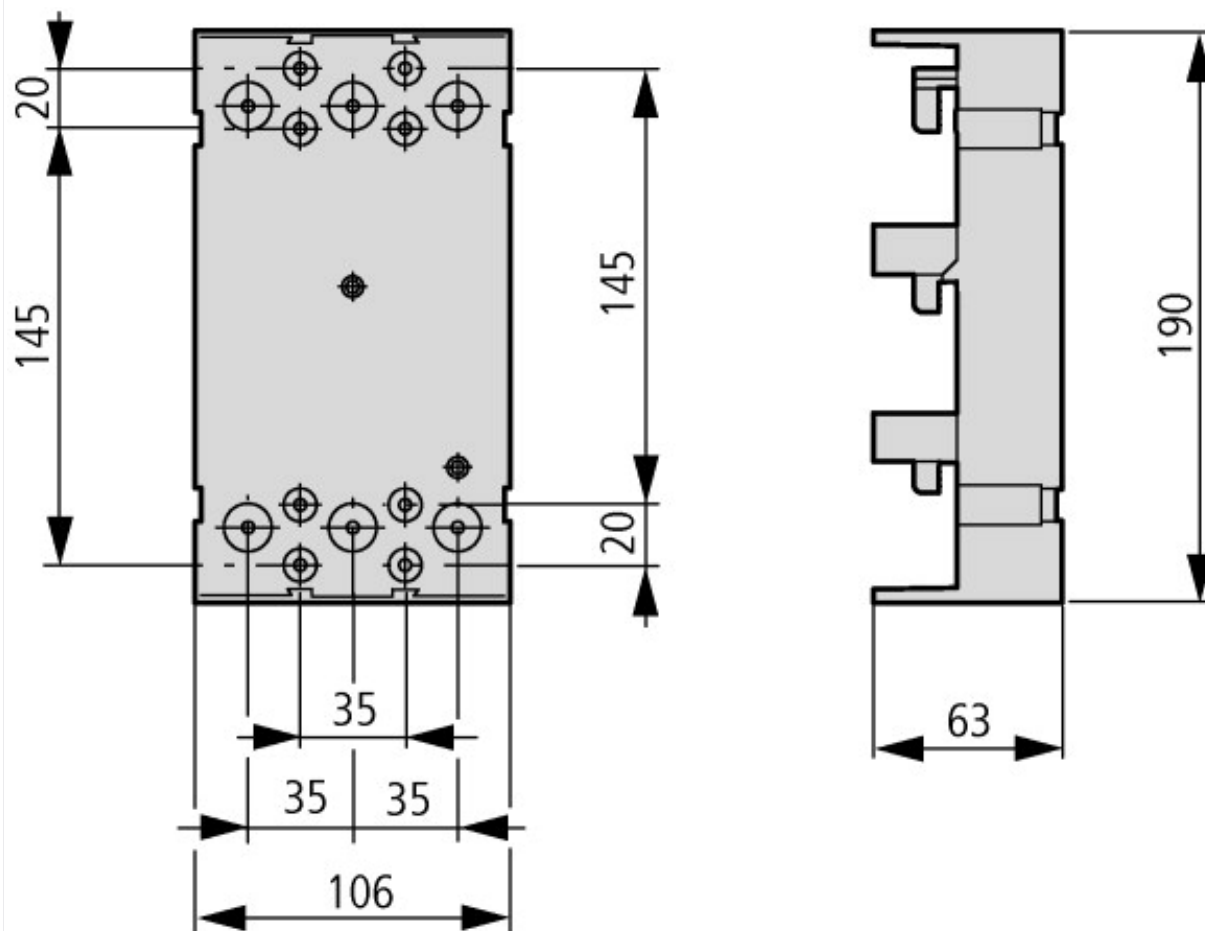

Additional product information (links)

IL01502145Z Component adapter for circuit-breakers and switch-disconnectors

IL01502145Z Component adapter for circuit-breakers and switch-disconnectors

https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01502145Z2016_09.pdf